

# XTR series




## Description

The newest commercial LED linear up and down fixture, superremely bright and efficient. Beautiful 65% down and 35% up light spread. The fixture comes in clean white finish and canopy mounting hardware. Emergency 90 min ballast feature is only available in four foot fixtures. Short lead time, the fixtures ship the following business day after the purshrase.

## Dimming

0-10v dimming is a standard dimming that requires 0-10v capable dimmer/switch and additional wiring. Bluetooth, DALI, DMX control is available for custom orders. Please contact the Centerlight for other questions and compatible dimmer/switches.

## Body color

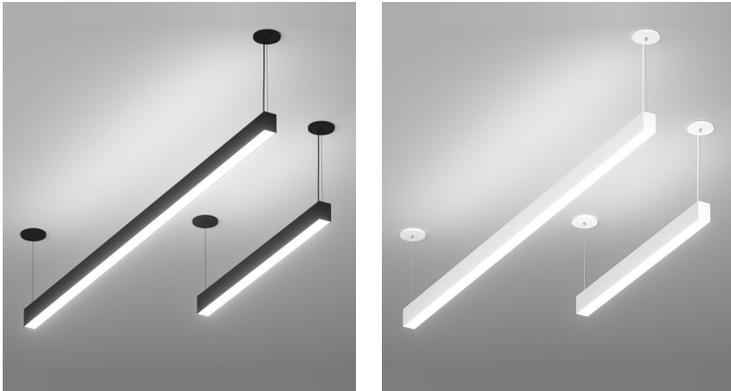


## Performance per fixture




Model:	XTR-4	XTR-8
Dimensions:	48" x 2.62" x 3.81"	96" x 2.62" x 3.81"
Total lumens:	3600 Lm	7200 Lm
Up/down Lumens:	1200 / 2400	2400 / 4800
Total watts:	33 W	66 W
Efficacy, CRI:	109 Lm/W, CRI: 95	
Input:	110/277 VAC	

## Types of Installation

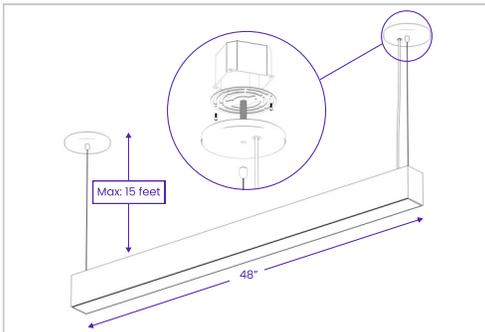


### J-BOX mount

Is a standard installation type for the XTR fixture. Each canopy set includes all the necessary hardware for j-box installation. The maximum length of the aircraft and power cables is 15 feet. Ideally fits on 3.5" and 4" octagon/square j-box.

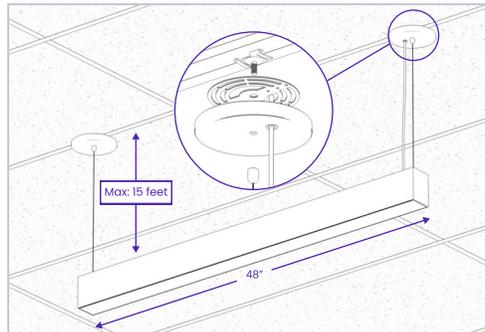

### T-Clip (for drop ceiling)

Is an optional hardware bracket for suspended ceilings that allows XTR fixture suspension directly on the T-grid. T-clip fits on a 15/16" grid, and it comes as a set of two brackets per fixture.

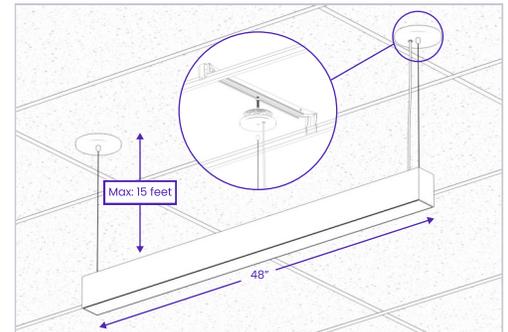

### T-Support (for drop ceiling)

Is an optional hardware bar for suspended ceilings installations that allows XTR fixture suspension through the panels and between the T-grids. It is fully adjustable for symmetric/asymmetric fixture positioning.

## Ordering guide

Sample: XTR-4-W-3000-EM-TS

Model::	XTR-4 / XTR-8	
Finish:	B-Black / W-White	
Color temp:	3000 / 3500 / 4000	
Emergency:	EM - built in 90 min battery	
Mouting type:	TS-T-support / TC-T-clip / J-j-box mount	

3D REVIT FILES (RFA)



PHOTOMETRIC (IES)



INSTALATION MANUAL



To order please contact our sales team: +1-855-960-0606, [info@centerlight.com](mailto:info@centerlight.com)