

# QUATTRO series



## Description

Indoor commercial pendant lighting fixture with unique design and advanced LED performances. Great up/down light distribution with 45% up and 55% down. Low power consumption with high CRI and switchable color temperatures that can be change at any moment. UL approved and title 24 compliant. The fixtures can be connected into longer runs (up to 36 feet or 9 fixtures with 110V AC and up to 80 feet or 20 fixtures with 277V AC) with the single power connection. All the necessary connection brackets and sockets come with each fixture. The Quattro fixtures have pre-installed switch to change color temperatures: 3000K, 3500K and 4000K.

## Dimming

Quattro fixture utilizes two types of dimming capability features. Step dimming – is an optional, convenient feature that allows fixtures to dim down to 75%, 50%, and 25% with a regular or pre-installed switch. 0-10v dimming is a standard dimming that requires 0-10v capable dimmer/switch and additional wiring. Please note that the step dimming feature doesn't function with the connected 0-10v dimmer/switch. Please contact the Centerlight for other questions and compatible dimmer/switches.

## Body color




## Performance per fixture




|                 |                        |
|-----------------|------------------------|
| Dimensions:     | 48"(L) x 8"(W) x 1"(H) |
| Total lumens:   | 4000 Lm                |
| Up/down Lumens: | 1800 Up, 2200 Down     |
| Total watts:    | 40W                    |
| Efficacy, CRI:  | 100 Lm/W, CRI: 90+     |
| Input:          | 110/277 VAC            |

## Types of Installation

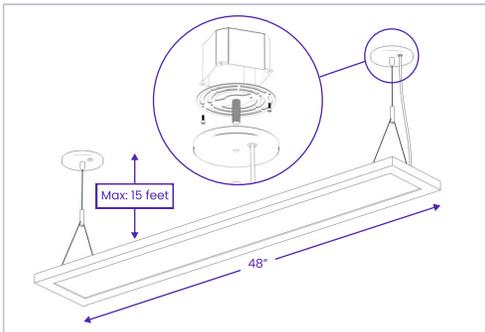


### J-BOX mount

Is a standard installation type for the Quattro fixture. Each canopy set includes all the necessary hardware for j-box installation. The maximum length of the aircraft and power cables is 15 feet. Ideally fits on 3.5" and 4" octagon/square j-box.

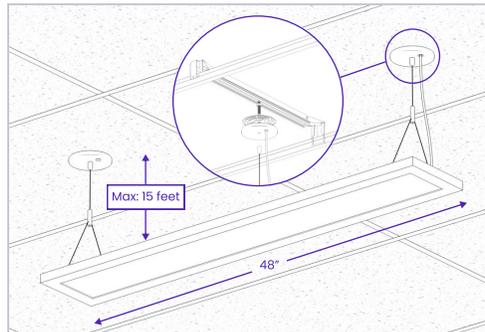

### T-Clip (for drop ceiling)

Is an optional hardware bracket for suspended ceilings that allows Quattro fixture suspension directly on the T-grid. T-clip fits on a 15/16" grid, and it comes as a set of two brackets per fixture.

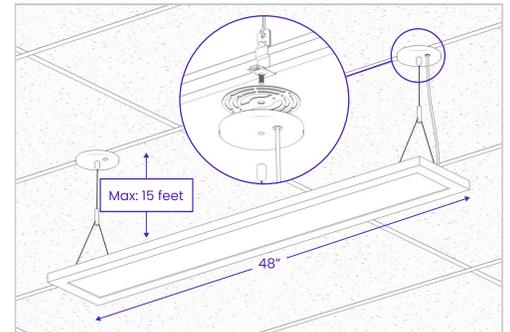

### T-Support (for drop ceiling)

Is an optional hardware bar for suspended ceilings installations that allows Quattro fixture suspension through the panels and between the T-grids. It is fully adjustable for symmetric/asymmetric fixture positioning.

## Ordering guide

Sample: QUATTRO-W-3000-TS

|               |  |  |
|---------------|--|--|
| Model:        | QUATTRO                                  |  |
| Finish:       | B-Black / W-White                        |  |
| Color temp:   | 3000 / 3500 / 4000                       |  |
| Mouting type: | TS-T-support / TC-T-clip / J-j-box mount |  |

3D MAX (3DS)



3D REVIT FILES (RFA)



PHOTOMETRIC (IES)



INISTALATION MANUAL



To order please contact our sales team: +1-855-960-0606, [info@centerlight.com](mailto:info@centerlight.com)